

QUALITY PROTECTS.

QUALITY WORKS.

LANXESS
Energizing Chemistry

Naugalube® 438

Octylated diphenylamine antioxidant

Naugalube® 438 is a solid antioxidant for use in a broad range of lubricants including turbine oils, gear oils, hydraulic fluids, compressor oils and greases. It provides excellent protection against high temperature oxidation and lubricant degradation in mineral and synthetic based fluids. Typical treat levels may range between 0.05% and 1.0%.

Naugalube® 438 can also be used in combination with other alkylated diphenylamines, phenyl- α -naphthylamine, hindered phenolics and/or secondary peroxide decomposer antioxidants, as well as appropriate metal deactivators, for enhanced performance.

Applications


Industrial						Marine		Aviation		Automotive				Grease		
Gear oil	Turbine oil	Hydraulic oil	Heat transfer oil	Chain oil	Compressor oil	Trunk piston engine oil	System oil	Turbine oil	Hydraulic oil	Gasoline engine oil	Diesel engine oil	Auto transmission fluid (ATF)	Differential fluid	Automotive grease	Industrial grease	Aviation grease
■	■	■		■	■		■	■		■	■	■	■	■	■	■

■ Primary recommendation ■ Alternative recommendation

X Naugalube® 438


Features	Benefits
Ashless antioxidant	Compatibility with exhausts after treatment systems
US FDA 21CFR178.3750 approved and Kosher certified	NSF HX-1 approval for use in lubricants subject to incidental food contact at a maximum of 0.5%
High molecular weight antioxidant	Low antioxidant volatility yielding prolonged presence in finished formulations
Excellent high temperature performance providing effective control against viscosity increase	Reduced oil oxidation and prolonged lubricant life
High purity with low sludging characteristics	Decreased wear, plugging and mechanical seal damage

Oxidation stability by PDSC – SAE 10W-30 PCMO

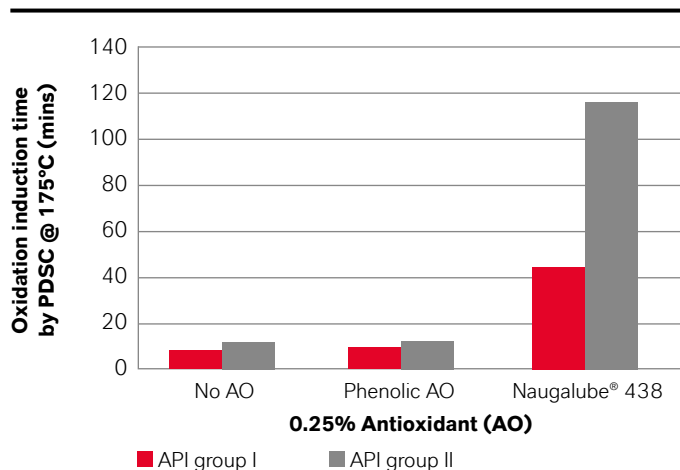

PDSC (Pressure Differential Scanning Calorimeter) testing highlighting the relative antioxidant performance of Naugalube® 438 against phenolic antioxidant chemistry in fully formulated Passenger Car Motor Oil based on Group I and II base stocks. The results reveal a clear and significant boost in antioxidant properties by using Naugalube® 438.

Oxidation stability test by RPVOT – turbine oil

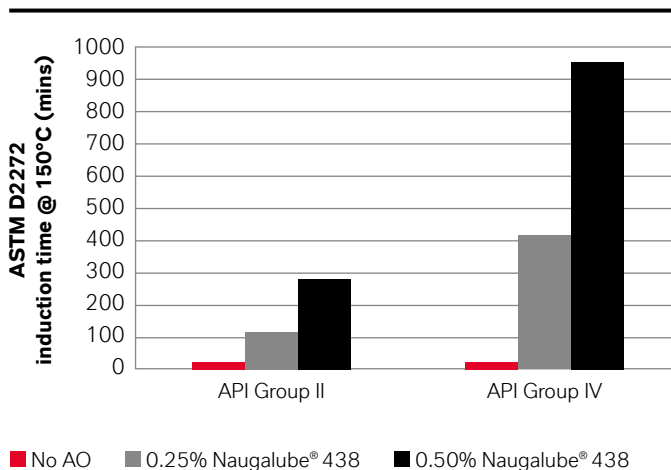

RPVOT (Rotating Pressure Vessel Oxidation Test) performance testing showing the antioxidant performance of Naugalube® 438 in Group II and IV based turbine oil formulations at varying treat rates. These are referenced against formulations containing no antioxidant.

Shipping information: 20 kg bags

LANXESS
 Energizing Chemistry

LANXESS Corporation
 Business Lubricant Additives
 2 Armstrong Road
 Shelton, CT 06484
 USA
 Tel: +1-203-573-2000

lubricant.additives@lanxess.com
<http://lab.lanxess.com>

The manner in which you use and the purpose to which you put and utilize our products, technical assistance and information (whether verbal, written or by way of production evaluations), including any suggested formulations and recommendations are beyond our control. Therefore, it is imperative that you test our products, technical assistance and information to determine to your own satisfaction whether they are suitable for your intended uses and applications. This application-specific analysis must at least include testing to determine suitability from a technical as well as health, safety, and environmental standpoint. Such testing has not necessarily been done by us. Unless we otherwise agree in writing, all products are sold strictly pursuant to the terms of our standard conditions of sale. All information and technical assistance is given without warranty or guarantee and is subject to change without notice. It is expressly understood and agreed that you assume and hereby expressly release us from all liability, in tort, contract or otherwise, incurred in connection with the use of our products, technical assistance, and information. Any statement or recommendation not contained herein is unauthorized and shall not bind us. Nothing herein shall be construed as a recommendation to use any product in conflict with patents covering any material or its use. No license is implied or in fact granted under the claims of any patent.

Health and Safety Information: Appropriate literature has been assembled which provides information concerning the health and safety precautions that must be observed when handling the LANXESS products mentioned in this publication. For materials mentioned which are not LANXESS products, appropriate industrial hygiene and other safety precautions recommended by their manufacturers should be followed. Before working with any of these products, you must read and become familiar with the available information on their hazards, proper use, and handling. This cannot be overemphasized. Information is available in several forms, e.g., material safety data sheets and product labels. Consult your LANXESS Corporation representative or contact the Product Safety and Regulatory Affairs Department at LANXESS.

Regulatory Compliance Information: Some of the end uses of the products described in this publication must comply with applicable regulations, such as the FDA, NSF, USDA, CPSC and BFR. If you have any questions on the regulatory status of these products, contact your LANXESS Corporation representative or Regulatory Affairs Manager at LANXESS.

Note: The information contained in this publication is current as of October, 2018. Please contact LANXESS Corporation to determine if this publication has been revised.

Naugalube®, LANXESS and the LANXESS Logo are trademarks of LANXESS Deutschland GmbH or its affiliates. All trademarks are registered in many countries in the world.